

ML-HDHA

HDMI TO HDMI Audio De-embedded

The state of art, easy to operate, Plug and Play and cost effective HDMI to HDMI Audio de-embedded convertor allows you to extract audio from HDMI source.

HDMI de-embedder Makes your installation easy in case of audio routing requirements when signal for Audio and Video is coming in as HDMI source. This convertor is having a standard HDMI input and HDMI output with De-embedded Audio output, which can be routed to Amplifier or can be routed to recording devices.


Let you decide about Analog or Digital ...

HDMI de-embedder is with 3 types of different audio connectors which gives you flexibility to design the right solution, not only that you can select the source as a digital or analog out for your digital or analog amplifier.

Application

- Board room,
- Rental & Staging ,
- Monitoring,
- Video conf.,
- Recording,
- Digital signage etc.

ML-HDHA

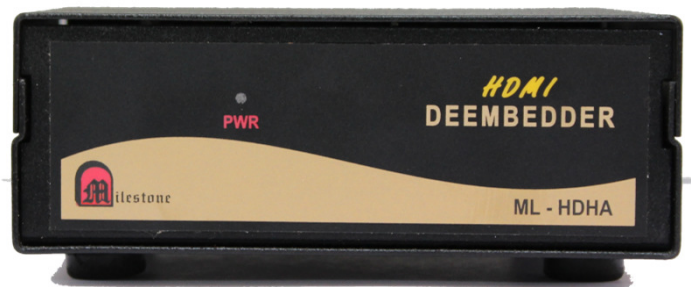

SPECIFICATIONS

- HDTV compatible
- Resolution Supports: 720i,720p,1080i,1080p
- Compatible with DVI Input - Output
- Operating Temperature: 5° to 55°
- Storage Temperature: -40 to 70°

Connections:

Input>

- 1 x HDMI standard female connector

Output>

- 1 x HDMI standard female connector
- 1 x 3.5 pin stereo female connector
- 1 x 2 RCA L/R stereo female connectors
- 1 x Toslink (fibre optic) connector.

Power:

100-240V A.C. Adapter > 5V DC – 1.0Amp.

Size:

(h/w/d) =50mm x 120mm x 115mm

Packing:

1*Manual,1*Power Adapter,1*De-embedder / convertor.

Applicable Product line.

Models:

ML-201 HDMI switcher

ML-401 HDMI switcher

ML-701 HDMI switcher

ML-402 HDMI switcher

ML-404 HDMI switcher

ML-HD101 HDMI OVER CAT-5

ML-HDVGAA – HDMI >> VGA AUDIO scaler

ML-VGAAHD – VGA AUDIO >> HDMI scaler

RF-4 RF remote controller for 4 channel switcher

RF-8 RF remote controller for 8 channel switcher

KY-4 4 channel wired Key pad controller

KY-8 8 channel wired key pad controller

ML-SCU1 serial control unit for RS232 port control

ML-SU1 0-64 channel selection, (0-9 and enter key)
